



Storm SLGR 1600X Dehumidifier



Distinct Features:

1. SLGR Microchannel Technology
2. Convenient storage for cable and drain tube
3. Condensate pump
4. Epoxy powder coating for corrosion protection
5. Quick access to internal service
6. Quick connector for Drain Tube and Cable
7. More capacity, less power consumption



Convenient water pipe and power line storage:
You can store the water pipe and power line in the side box.



Storm SLGR 1600X with rugged rotational molding housing operates well in severely damp environment after flood damage. With **SLGR Microchannel**, it removes plenty amounts of moisture from damp air environment and returns a dry house environment.




Two Main Damage of Flooding

Flood is an expensive natural disaster that do damage to multiple areas of human life, community and industry. It includes damage to property, loss of human life, destruction of plants and crops, etc.. But to the restoration market, dehumidifier mainly focuses on the follow two fields restoration work.



► Structural damage

After flood sweeping house and farm, wooden structure house is susceptible to mold and rot. Wooden damage will lead to uneven floor and deformed door frame, which exist high risks for living. For exterior walls, it can easily absorb the moisture condensed on its cool surface. As the temperature of wall continuously lowers, the wall absorbs more water. This is a terrible cycle as in the end the wall material will be absolutely damaged.



For high maintenance fee, 15% of the wooden parts request repair caused by rot and mold, which leads to about 20 billion board feet destruction of timber. Those destruction is much more than what is destroyed by fire!

► Health Condition Related To Waterborne Diseases

Excess dampness and moisture are the result of flooding. When relative humidity levels reaches 60% or higher in the space, it become the incubator for mold, mildew and fungi. Those microorganisms thrive on the surface of damp wood, dirt, cardboard and any kind of paper material.




Medical research has provided strong evidence that respiratory infections, asthma, arthritis, neuralgia, chronic bronchitis, cough, skin diseases like urticaria are all closely related to damp living environment people lives in. dampness-related factors are long, unconsciously and chronic damage to people's inner health.

Medical research has provided strong evidence that respiratory infections, asthma, arthritis, neuralgia, chronic bronchitis, cough, skin diseases like urticaria are all closely related to damp living environment people lives in. dampness-related factors are long, unconsciously and chronic damage to people's inner health.

The Solution

Storm SLGR 1600X dehumidifier, as a professional dehumidifier for restoration marketing, has an amazing dehumidifying effect and restoration effect. It beats down conventional dehumidifiers absolutely with **SLGR Microchannel Technology** adopted. Besides satisfactory restoration effect in normal humidity and temperature environment, **Storm SLGR 1600X** is a master-hand of the restoration field especially to dehumidify in hot dry environment and cold humid environment.



G3



Storm SLGR 1600X Dehumidifier



Specifications

Features	Storm SLGR 1600X
CE, ETL	✓
Compressor Type	Rotary
More Thorough, And More Quick	✓
Ducting options	✓
Condensate Pump	✓
Telescope Handle	✓
Water Full protection	✓
Environmental R410A Refrigerant	✓
Memory Starting	✓
Washable Air Filter	✓
Wheels	✓
Rotational Moulded Body	✓
Convenient Storage for Cable / Hose	✓
Low Temperature	✓
Quick connection to Cable/Hose	✓

Specifications	Storm SLGR 1600X
SLGR Microchannel	Excellent In Low Humidity and High Temperature
Power	115V/60HZ, 220V/50HZ
Size For	Up to 7,000 Sq. FT
Filter	Pre-filter
Air flow	400CFM, 680CMH
Sound Pressure Level	<55DBA
Refrigerant	R410A
Wheel	2 Samll Wheel
Draining	Condensate Pump
Defrosting Control System	Automatic Defrosting
Functioning Temperature Range	1~40°C
Functioning Humidity Range	35~95%
Capacity 115V(80°F-60%)	160Pints
Capacity 220V(30°-80%)	160L
COP(115v/60Hz)	2.7L/Kwh at 80°F/60%
Weight	82lbs(42KG)
Dim(W*H*D)	500*420*770mm
Loading quantity	40"H: 280Sets; 40": 224Sets; 20": 104Sets

PROVEN PERFORMANCE

Storm SLGR 1600X with great COP 3.1L/Kwh at 80°F/60%(115V/60Hz) and huge capacity 160PPD at AHAM condition makes CE, ETL certified in first class. Moreover, the unit has a tension rod on its top for convenient transport.


As for the tough environment that flood disasters might have, rotational molding housing is rugged enough to endure severe collision and corrosion found in water damage restoration and construction. It handles severe environment after flooding and takes much more moisture from damp housing.




1. During the dis-assembly of unit, the front board can be take away directly without the interference of any power lines.



2. Disassemble a side plate, you can bring out circuit board from the unit without disassembling the whole unit.



Cold Energy Storage



Microchannel cold and heat exchanger



Pump



— Restoration & Moisture & Ventilation —

ALORAIR

Restoration & Cleaning Dehumidifiers >>

Alorair Solutions INC. Web: www.alorair.com

E-mail: sales@alorair.com

Warehouse/Product Exhibition Center

Add: 16300 Shoemaker Ave, Cerritos, CA 90703

Tel: 888-990-7469

East Coast, Sales & Distribution Centre

Add: 14021 NC Hwy 50 Surf City, NC 28445


Tel: 910-660-0962

1600X SLGR Storm Dehumidifier



How Does SLGR works?

SLGR microchannel technology has improved the performance and efficiency. The ALORAIR SLGR technology uses a special air-to-air heat exchanger system to help bring the air closer to dew point temperature before it passes over the super-cooled evaporator coils, besides with the combination of Microchannel Alu Condenser, Maximize the Capacity and efficiency. The purpose of microchannel condenser is to improve energy efficiency. The use of microchannel condenser technology can improve the 50% dispersion effect of condenser, 30% heat exchange area and 50% refrigerant quantity. When the SLGR microchannel is combined, the efficiency of the dehumidifier can be increased by 30~50%. This leads to more condensation that forms on the coils inside the machine, and fastest for interchange of heat, which in turn leads to more moisture pumped out and less moisture in the air that is returned to the room. This extra efficiency makes ALORAIR SLGR dehumidifier perfectly suited for low humidity conditions.

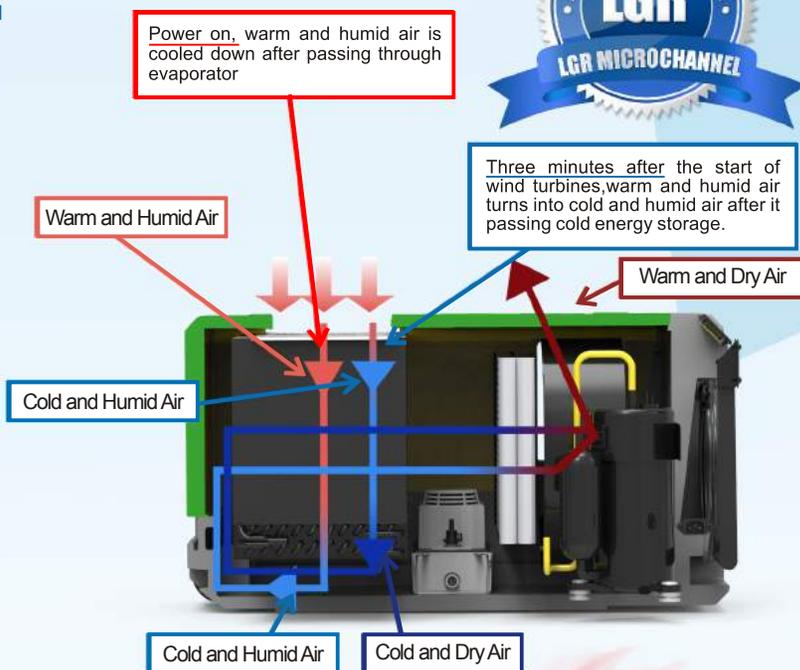

Knowing More about the Difference Between LGR/SLGR and Conventional Dehumidifiers LGR Definition

What is the LGR dehumidifier? Is it a dehumidifier just says "LGR" on the Label? The answer is certainly NO!!! Do not believe someone simply used as a marketing term.


The IICRC S500 2006 defines LGR as it have an enhanced refrigeration system that allows the dehumidifier to dry a space to much lower humidity than conventional dehumidifiers, it is achieved by the precooling designs, air-to-air heat exchanger, LGR can effectively remove some moisture below 34GPP, removes more water with less electricity consumed, continue to dry at lower humidity, such as 80F/20%, that conventional dehumidifier does not works.

As a water damage restoration professional, you need professional-grade equipment that helps you tackled the toughest of jobs and deliver outstanding results for your clients. A powerful dehumidifier is a key component in your suite of tools.

What type of dehumidifier do you need? We provide a series of professional dehumidifiers, both LGR and conventional options. What are the differences, and which is best for you? Here's a rundown of LGR dehumidifiers vs. Conventional dehumidifiers and their unique benefits:

CONVENTIONAL DEHUMIDIFIERS

The conventional dehumidifiers are designed for most water-damage remediation projects. A feature same as LGR dehumidifier they can easily be transported from job to job and loaded and unloaded from a vehicle. the conventional dehumidifier draws moisture-laden air across a set of super-cooled coils. As the air passes over, its temperature drops below dew point and water condenses on the cold coils. The dry air is reheated and exhausted to the room to collect more moisture. Compared to ALORAIR SLGR dehumidifiers, conventional models are not as effective or efficient at removing moisture and drying air in environments with large volumes of water as LGR models are. However, conventional dehumidifiers are less expensive than their LGR dehumidifiers.

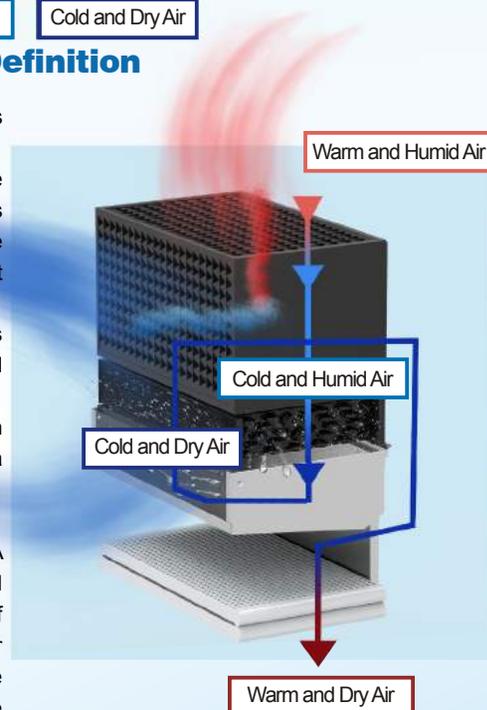

SLGR DEHUMIDIFIERS, Why We call as SLGR (Super LGR) Technology?

SLGR stands for Super low-grain refrigerant, How do they work? The ALORAIR SLGR technology uses a special air-to-air heat exchanger system to help bring the air closer to dew point temperature before it passes over the super-cooled evaporator coils, besides with the combination of Microchannel Alu Condenser, Maximize the Capacity and efficiency. This leads to more condensation that forms on the coils inside the machine, and fastest for interchange of heat, which in turn leads to more moisture pumped out and less moisture in the air that is returned to the room. This extra efficiency make ALORAIR SLGR dehumidifier perfectly suited for low humidity conditions. When faced with particularly challenging water damage restoration jobs where higher amounts of water are involved, an SLGR dehumidifier is your best bet for achieving maximum results.

